


## Extender Cable

**Provides interconnection anywhere within the MWS**

Female and Male EZ-Wiring connectors deliver safe and intuitive connections.

### Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)

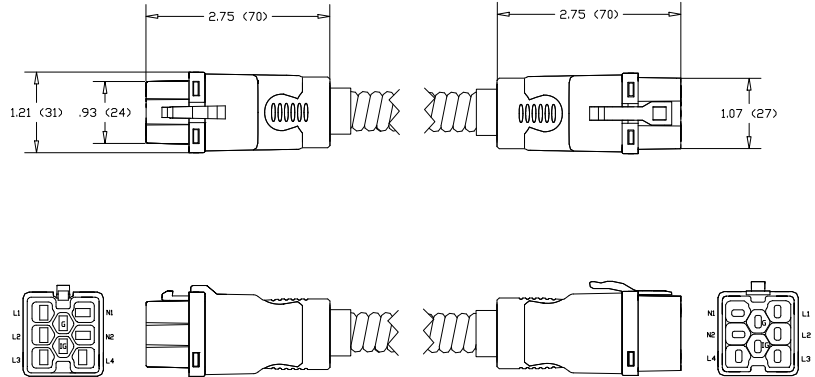

### Notes

1. Dimensions are in inches (millimetres).
2. 125/250V 20A (4L, 2N, 2G) keyed-orientation is shown.
3. 480 and 600V product cCSA certified only "not for interrupting current".
4. Other system ratings and applications are available in uniquely-keyed and colour-coded configurations.

### Ordering Information

**Catalogue No.** **T H – VC – LNGO – E III A UU**

**T** Standard **1** = UL/CSA (MC/AC-90 Cable), **2** = CSA (AC-90 Cable)

**VC** System **22** = 125/250V 20A, **42** = 277/480V 20A, **62** = 347/600V 20A

| <b>LNGO</b> Application | <b>Power Distribution</b>       | <b>Switch</b>                        | <b>DALI Lighting Controls</b>                      |
|-------------------------|---------------------------------|--------------------------------------|--|
| 8w                      | <b><u>4220</u></b> = (4L 2N 2G) |                                      |  |
| 8w                      | <b><u>3320</u></b> = (3L 3N 2G) |                                      |  |
| 7w                      | <b><u>4210</u></b> = (4L 2N G)  |                                      | <b><u>3112</u></b> = 3Ph 4w w/ DALI (3L N G 2D)    |
| 6w                      | <b><u>2220</u></b> = (2L 2N 2G) |                                      |  |
| 5w                      | <b><u>2210</u></b> = (2L 2N G)  |                                      |  |
| 5w                      | <b><u>3110</u></b> = (3L N G)   |                                      | <b><u>1112</u></b> = Single Cct w/ DALI (L N G 2D) |
| 4w                      | <b><u>2110</u></b> = (2L N G)   | <b><u>1012</u></b> = 3, 4-Way Switch |  |
| 3w                      | <b><u>1110</u></b> = (L N G)    | <b><u>1011</u></b> = Switch          |  |

**III** Length in dm **040** = 4.0m

**A** Cable Type **A** = Standard Armoured Cable  
**H** = Halogen Free Armoured Cable

**UU** Wire Upsize **blank** = none, **10** = Upsized Neutrals only, **11** = Upsize all conductors

