

## Phase Tap

### Delivers multi-circuit distribution point for EZ-Wiring MWS

Pre-wired enclosure provides cost-effective installation of modular wiring system distribution centers.

Converts 8-wire (up to 4 circuit) input into individual circuit connection points. Suitable for power distribution and lighting.

### Specifications

- Compact 1U height
- 16 gauge galvanized steel enclosure
- Integrated mounting brackets for flexible installation options
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)

### Ordering Information

#### 5-wire 3-Phase Selector

Cat No. 1H – **VC** – 3110 – B100203-Z

where,

**VC** System      **22** = 125/250V 20A  
                          **42** = 277/480V 20A  
                          **62** = 347/600V 20A



#### 8-wire 3L, 3N, 2G (125/250V 20A) Phase Selector

Cat No. 1H –22 – 3320 – B100203-Z


#### 8-wire 4L, 2N, 2G (125/250V 20A) Phase Selector

Cat No. 1H –22 – 4220 – B100203-Z


For configurations not shown here, please contact Electec

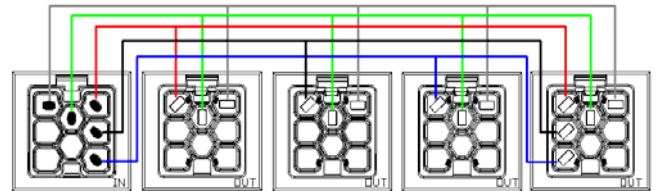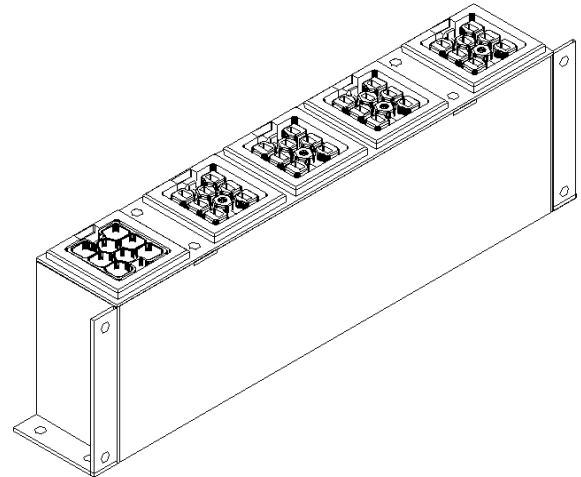

5-Wire 3-Phase Selector (347/600V 20A shown)

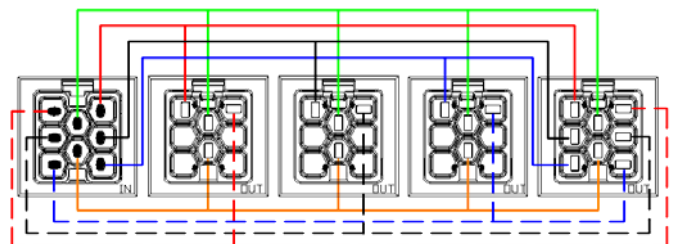

8-Wire 3L, 3N, 2G Phase Selector

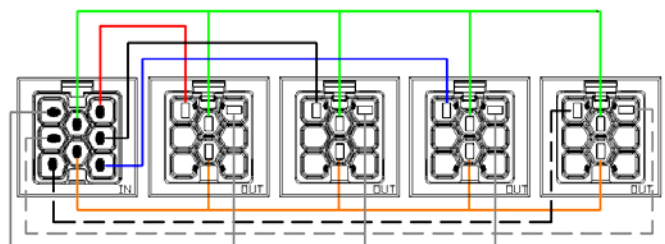

8-Wire 4L, 2N, 2G Phase Selector

